

02-18-00  
CONTINUING PATENT APPLICATION TRANSMITTAL

(for Continuing Applications  
under 37 C.F.R. §1.53(b))

Attorney Docket No. 68199

First Named Inventor or  
Application Identifier: Smith, et al.



Box PATENT APPLICATION  
Commissioner of Patents and Trademarks  
ATTENTION: Assistant Commissioner  
for Patents  
Washington, D.C. 20231

Sir:

This is a request under 37 C.F.R.  
§1.53(b) for filing a:

- ( ) Continuation application,  
( ) Divisional application,  
(X) Continuation-in-Part application,

) CERTIFICATE OF MAILING BY "EXPRESS MAIL"

) "Express Mail" Mailing Label Number

) EL 225109738 US

) Date of Deposit 02/16/00

) I hereby certify that this paper or fee is being  
) deposited with the United States Postal Service  
) "Express Mail Post Office to Addressee" Service  
) under 37 CFR §1.10 on the date indicated above and  
) is addressed to the Commissioner of Patents and  
) Trademarks, Washington, D.C. 20231.

) Ed Price

) (Typed or printed name of person mailing)

) (Signature of person mailing)

of pending prior application number 09/252,044

filed on February 17, 1999 of Valente, et al.

(Date) (Inventor(s))

for PROGRAMMING A LOGIC BOARD FROM SWITCHING POWER  
(Title)

1. (X) This is a continuation or divisional application. Enclosed is a copy of the prior application as originally filed, including specification, claims, drawings, and oath or declaration.

- or -

- ( ) Enclosed is a patent application (for continuation, divisional, or continuation-in-part applications) containing:

( ) \_\_\_\_\_ pages of the specification (including claims).

( ) \_\_\_\_\_ sheets of drawings ( ) Formal ( ) Informal.

2. (X) Amend the specification by inserting before the first line the sentence: --This is a [ ] continuation, [ ] division, [X] continuation-in-part, of prior application number 09/252,044, filed February 17, 1999, which is hereby incorporated herein by reference in its entirety.-- The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under paragraph 3 below, is considered as being part of the disclosure of the accompanying application, and is hereby incorporated by reference therein.

3. (X) A copy of the executed oath or declaration filed in the prior nonprovisional application is enclosed.
4. ( ) Inventorship:
  - ( ) A newly-executed oath or declaration and power of attorney is enclosed (for continuation-in-part applications, or for continuation or divisional applications naming an inventor not named in the prior application) (§1.63(a), (d)(5) and (e)).
  - ( ) Because this application is being filed by fewer than all of the inventors named in the prior application, delete the following inventor(s) named in the prior nonprovisional application (37 C.F.R. §1.63(d)(1)(2)):  

---

---
  - ( ) The names of persons believed to be the actual inventors are set forth in the enclosed unexecuted oath or declaration and power of attorney (§1.41(a) and §1.53(b)).
5. ( ) Assignment(s) of the invention to \_\_\_\_\_, and cover sheet are enclosed.
  - ( ) A check in the amount of \$\_\_\_\_\_ to cover the fee for recording the assignment(s) is enclosed.
6. (X) The prior application is assigned of record to  
The Chamberlain Group, Inc.
7. ( ) Small Entity Status (37 C.F.R. §1.28(a)(2)):
  - ( ) A statement of status as a small entity is enclosed.
  - ( ) A statement of status as a small entity was filed in the prior application, and small entity status is still proper and desired in this new nonprovisional application.
  - ( ) Status as a small entity is no longer claimed.
8. ( ) A 37 C.F.R. §3.73(b) statement is enclosed (where an assignee seeks to take action in a matter before the Patent Office).
9. ( ) A preliminary amendment is enclosed.
10. (X) Drawings:
  - ( ) Transfer the drawings from the prior application to this application and abandon said prior application as of the filing date accorded this application. A duplicate copy of this sheet is enclosed for filing in the prior application file. (May be used only if signed by person authorized by §1.138 and before payment of base issue fee.)

( ) New formal drawings are enclosed.

(X) Informal drawings are enclosed.

11. (X) A separate written request under 37 C.F.R. §1.136(a)(3), which is a general authorization to treat any concurrent or future reply requiring a petition for an extension of time under 37 C.F.R. §1.136(a) for its timely submission as incorporating a petition for an extension of time for the appropriate length of time, is enclosed.

12. ( ) An Information Disclosure Statement is enclosed.

( ) A Form PTO-1449 is enclosed.

( ) \_\_\_\_\_ References (copies) listed on the Form PTO-1449 are enclosed.

13. ( ) A MicroFiche Computer Program (Appendix) is enclosed.

14. (X) A Return Receipt Postcard is enclosed (MPEP §503).

15. ( ) A Nucleotide and/or Amino Acid Sequence Submission is enclosed.

( ) A Computer Readable Copy is enclosed.

( ) A Paper Copy (Identical to Computer Copy) is enclosed.

( ) A Statement Verifying Identity of above Copies is enclosed.

16. ( ) Priority of application number \_\_\_\_/\_\_\_\_ filed on \_\_\_\_\_ in \_\_\_\_\_ is claimed under 35 U.S.C. §119.

( ) The certified copy of the priority document has been filed in prior application number \_\_\_\_/\_\_\_\_, filed \_\_\_\_\_.

( ) A certified copy of the priority document is enclosed.

17. (X) Power of Attorney:

(X) The power of attorney in the prior application is to:

(X) Robert J. Fox Reg. No. 27,635,  
FITCH, EVEN, TABIN, & FLANNERY  
Suite 1600  
120 South LaSalle Street  
Chicago, Illinois 60603-3406  
and other members of the firm.

( ) Customer Number 22242.

( ) The power appears in the original papers in the prior application.

( ) Since the power does not appear in the original papers in the prior application, a copy of the power in the prior application is enclosed.

18. ( ) Cancel in this application original claims \_\_\_\_\_ of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)

19. (X) The filing fee is calculated below:

<u>Fee Calculation for Claims as Filed in the Prior Application, Less Any Claims Cancelled by Amendment</u>		
(X) Basic Utility Fee	\$ 690.00	\$ <u>690.00</u>
• (X) Independent Claims <u>4</u> - 3 = <u>3</u> x \$ 78.00 =		\$ <u>78.00</u>
• ( ) Total Claims <u>28</u> - 20 = <u>8</u> x \$ 18.00 =		\$ <u>144.00</u>
• ( ) Fee for Multiply Dependent Claims	\$260.00	\$ _____
or		
( ) Basic Design Fee	\$ 310.00	\$ _____
Total of above Calculations		\$ <u>912.00</u>
Reduction by 50% for Filing by Small Entity		\$ _____
Total		\$ <u>912.00</u>

20. (X) A check in the amount of \$ 912.00 enclosed.

21. (X) The Commissioner is hereby authorized to charge any fees which may be required under 37 C.F.R. §§1.16 and 1.17 and are not paid herewith, or credit any overpayment, to Deposit Account Number 06-1135. A duplicate copy of this request is enclosed.

22. ( ) Also enclosed:

23. (X) Address all future communications to Customer Number 22242.



FITCH, EVEN, TABIN & FLANNERY  
Suite 1600  
120 South LaSalle Street  
Chicago, Illinois 60603-3406  
Telephone: (312) 577-7000  
Facsimile: (312) 577-7007

February 16, 2000  
(Date)

Robert J. Fox  
Robert J. Fox  
Registration No. 27,635  
(X) Attorney or agent of record  
( ) Filed under §1.34(a)

METHOD AND APPARATUS FOR PROGRAMMING  
A LOGIC BOARD FROM SWITCHING POWER

BACKGROUND OF THE INVENTION

5 This invention relates to a method and apparatus for programming and controlling a logic board for an electromechanical device such as a movable barrier operator using a two input command unit.

Many electromechanical devices, such as garage door operators and rolling shutter operators, employ simple  
10 wall or transmitter command units having only two types of input (open and close). Control of the operator is provided on a logic board, a board which contains the electronic circuitry (including a controller) for controlling operation of the motor driving the movable  
15 barrier. In a garage door operator or rolling shutter operator, commands are provided for open and close. Upon receipt of an open or close command, the controller enables the motor for movement in the commanded direction. In a garage door operator, a simple,  
20 momentary press of an open button or switch commands the door to move to the open limit position. In a rolling shutter operator, the user must press the open button or switch while the shutter is moving and release the button or switch when the shutter reaches the desired open  
25 position.

Many older garage door installations and rolling shutter installations are controlled by wall units having only open and close switches, which are hardwired into the wall. Newer garage door operators and rolling  
30 shutter operators provide additional features and include programming through either the wall switch or the remote transmitter. For example, many operators respond to transmitters with unique identification codes, provided the identification codes are programmed into the  
35 controller memory. To program a new transmitter, the

user must typically press a learn switch which places the controller in the learn mode, then activate the transmitter so that the controller receives the unique identification code. Many such units require a separate  
5 learn switch on the wall unit. If a user wishes to upgrade to a more advanced garage door operator or rolling shutter operator, i.e., one with additional functionality, the user may not wish to spend the additional cost of having to tear out existing wiring.

10 In order to change the mode of a logic board (or controller), most systems require the microprocessor to receive an input in the form of a signal. Since some logic boards only have power when the switch is closed (as is the case in rolling shutter operators), there is  
15 no power to the board after release of the switch. This creates a problem for entering the program or learn mode when there is no power applied to the logic board. A system which enables the user to enter the program or learn mode by using the AC power lines solves the problem  
20 of having to provide additional components or wiring to the board in order to sustain power just for the unit to be able to enter the program or learn mode.

Several manufacturers of rolling shutter operators and garage door operators provide units which can be  
25 programmed from the wall unit. However, many of these units require non-retrofit of a special wall switch which operates on low voltage power, not standard AC wall power (such as those by Simu and Jolly). Another manufacturer provides a special wall control unit which operates on AC  
30 power, but is a nonstandard switch (Elero).

There is a need for a method of programming a logic board (or controller) for an electromechanical device such as a movable barrier operator using an existing two input command unit. There is a need for a method of  
35 programming a controller for an electromechanical device such as a rolling shutter operator or awning operator which operates from the existing standard industry two

switch AC wall unit. There is a need for a method of programming an electromechanical device which generally has no power applied to it.

#### SUMMARY OF THE INVENTION

5           A method of programming a controller for a movable barrier operator according to the invention includes enabling and disabling an input device within a predetermined period of time for a predetermined number of times. This sequence of short activations of an input  
10 device, such as a switch on a wall unit, puts the controller in a learn mode. Thereafter, the controller is responsive to learn any of various characteristics that can be programmed for the movable barrier operator, such as transmitter code, limits of travel, force  
15 settings, and so on.

          In a movable barrier operator, such as for a rolling shutter, the wall control unit includes two input devices, which may be switches, one for the shutter open direction and one for the shutter close direction. When  
20 the user wishes to open the shutter, the user presses the open switch. This causes AC power to be applied to the logic board controlling the power to the motor that operates the shutter. The user must hold the open switch until the shutter reaches the desired open location.  
25 Releasing the open switch removes AC power from the logic board and the motor and stops the shutter. Similarly, when the user desires to close the shutter, the user must press and hold the shutter close switch applying power to drive the motor to close the shutter until the desired  
30 close position is reached. Upon reaching the desired close position, the user releases the close button, removing AC power and stopping the motor.

          Pressing of the open switch or the close switch is required to apply AC power to the controller. Continued  
35 closure of a switch is associated with movement of the

motor and shutter. To enable programming of the controller using the wall switches, the controller checks for a series of pulses from one of the wall switches. When, for instance, the user presses and releases the open switch, five consecutive times each for less one half second, the controller increments a counter with each press. So long as the duration between press and release is less than a half second, the counter is incremented. When the counter value reaches five, the controller enters a learn mode. If at any time the user presses the switch for longer than one half second, the controller zeroes the counter and responds to a movement command.

In a movable barrier operator such as garage door opener in which the controller unit is powered at all times, the controller unit can also be programmed using the method of the invention. In the case of a garage door operator activated by a single button wall control unit, typically only a momentary activation (press and release) of the switch causes the door to travel to the selected limit (open or close). To implement the method of the invention, the controller for the garage door operator would be programmed to look for a fixed, but longer duration pulse resulting from switch closure for the movement command. For example, if five consecutive pulses produced by press and releases of less than one half second are used to enter the learn mode, a one second pulse from a press of one second could be used to clear the wall control command counter and activate door movement in the desired direction.

Instead of a standard two button wall control unit, some movable barriers have a single switch with three states: up, down, not traveling. The method described above is equally applicable. An advantage of the invention is that no additional wiring is needed for existing installations. All modifications are accomplished in the controller either in circuitry or



software.

If the movable barrier operator includes a receiver for receiving commands from a remote transmitter, the method can also be used. Instead of activating the wall  
5 switch the predetermined number and duration of wall control pulses generated by presses and releases, the user would activate the transmitter button the same number and duration of time.

In many applications where the mode of the  
10 controller or logic board must be programmed by an external system, such as by pushing a button, through a software interface, or via a physical change in the surrounding environment, etc., programming the controller from AC power line eases the programming scheme for the  
15 user, the installer and the manufacturer.

In a further embodiment, the AC power line may also be used to transmit operation instructions to a movable barrier operator. For example, group control of a plurality of rolling shutters may be achieved by using  
20 the controller or logic board of the rolling shutter unit to monitor the power line for, and receive, a series of binary digits generated by the activation and release of one of the wall control input switches. More particularly, the wall control input switch can be used  
25 to toggle the power line on and off to generate a series of binary ones and zeros, (e.g., power on is a binary one or high signal, and power off is a binary zero or low signal). Upon receipt of such a series of ones and zeros, the controller can decode the binary data and  
30 perform the function or operation attributed to such input. In order to limit the risk of accidental data reception, the controller can be designed so that only activations within a defined period of time that last for a duration of time less than the normal motor operation  
35 command will trigger the controllers performance of a particular function or operation. In order to achieve group control of a plurality of rolling shutters, the

5 wall switch may be activated five times with each  
activation being within three hundred milliseconds of  
another, and the duration of the activation being below  
the half second of activation which causes the controller  
to operate the motor in a specified direction. The  
number of activations it takes to enter a particular mode  
of operation is not critical. For example, the learn  
mode may be entered upon seven activations of the input  
switch. In some instances, a uniform number of switch  
10 activations may be used to perform different operations.  
For instance, there may be no need to have the learn mode  
occur after five switch activations and the reset mode  
after nine switch activations. Therefore, the controller  
would both reset the movable barrier operator and enter a  
15 learn mode together after seven activations of the input  
switch.

Similarly, other embodiments of the invention would  
include entering the movable barrier operator into a lock  
mode after twenty activations of the input switch. Such  
20 a mode of operation would allow the user to lock movement  
of the movable barrier until the release mode is entered.  
The release mode can be entered by simply activating the  
input switch twenty more times. A memory clear mode  
could be entered by activating the input switch fifty  
25 times. Such a mode of operation would allow a user to  
clear all memory of such things as up limits and down  
limits in a rolling shutter.

Additional advantages and features of the invention  
may be appreciated from the written description set forth  
30 below and accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of a garage door  
operating system in accordance with an embodiment of the  
invention;

35 Fig. 2 is a perspective view of a rolling shutter

operating system in accordance with an alternative embodiment of the invention;

Fig. 3 is a perspective view of the tubular motor assembly of Fig. 2;

5 Figs. 4 and 5 are two exploded perspective views of the location of the absolute position detector assembly shown in Fig. 3;

Fig. 6 is a schematic diagram of the electronics controlling the rolling shutter head unit of Fig. 2;

10 Figs. 7A-7C are a flow chart of an overall routine for operating and controlling a movable barrier operator; and

Figs 8A-8C are a flow chart of the timer interrupt routine called in the routine of Fig. 7.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

15 Referring now to the drawings, and especially to Fig. 1, a movable barrier operator embodying the present invention is generally shown therein and identified by reference numeral 10. The movable barrier operator 10 is employed for controlling the opening and closing of a  
20 conventional overhead garage door 12 of a garage 13. The garage door 12 is mounted on guide rails 14 for movement between the closed position illustrated in Fig. 1 and an open or raised position. The garage 13 includes a ceiling 16 and a wall 18 defining an opening blocked by  
25 garage door 12. As shown, guide rails 14 are mounted to wall 18 and ceiling 16 of the garage 13 in a conventional manner.

A power drive unit or head, generally indicated at 20, is mounted to the ceiling 16 in a conventional  
30 manner. A drive rail 22 extends between the power drive unit 20 and the garage wall 18. As can be seen in Fig. 1, one end of the drive rail 22 is mounted to a portion of the garage wall 18 located above the garage door 12. An operator arm 26 is connected at one end to  
35 the garage door 12 and at the other end to a trolley 28

mounted for movement back and forth, along the drive rail 22. As will be seen herein, a motor in the power drive unit 20 propels the trolley 28 in a desired manner to raise and lower garage door 12 via the coupling of the trolley 28 and the operator arm 26 to the garage door 12.

A conventional one-button push button wall control unit 32, is coupled by electrical conductors 34 to the power drive unit 20 and sends signals to the power drive unit 20, controlling operation of a drive motor therein. Preferably, the power drive unit 20 also includes a conventional radio receiver (not shown) for receiving radio signals from a remote control transmitter 38.

Referring now to Fig. 2, a barrier operator system 100 employing an absolute position detector is employed for controlling the opening and closing of a conventional rolling shutter 112. The rolling shutter is mounted on guide rails 114 for movement between the closed position illustrated in Fig. 2 and an open or raised position. The wall 118 defines an opening that can be blocked or covered by the rolling shutter 112. As shown, guide rails 114 are mounted to wall 118 in a conventional manner.

A power drive unit or head, generally indicated at 120, is mounted to the top of frame 110 in a conventional manner. Although the head unit is shown as being mounted on the exterior, as noted above, in many applications, the head unit is built into the wall so that the user sees only the shutter. In the two views shown in Fig. 2, the head unit 120 is shown mounted on opposite sides of the top of frame 110. As will be seen herein, a motor in head unit 120 propels a shutter carrying sleeve or tube 142 to raise and lower rolling shutter 112 via the connection of sleeve 142 to rolling shutter 112.

Control for head unit 120 may be as described above for garage door operator 20, i.e., using a push button wall control or a keypad mounted at another location on a wall. A conventional two button wall control unit 132 is

connected via three wires: up, down, neutral (built into the wall and shown in dotted form) to head unit 120. Wall control 132 includes a shutter open button or switch 132A and a shutter close button 132B. Wall control 132 is connected to AC power and provides power to head unit 120 when one of buttons 132A or 132B is pressed and held. Additionally, head unit 120 may also include a conventional radio receiver (not shown) for receiving radio signals from a remote control transmitter. If desired, the head unit 120 may be mounted on either side of the frame 110. However, a conventional radio receiver requires power in order to receive a signal from a remote transmitter.

As shown in Figs. 3, 4 and 5, head unit 120 includes a tubular housing 138 and end sections 122 and 134. Within the tubular housing 138 is the motor 130 which includes an output shaft 131 coupled at one end to end section 134 and at the other end to driving gear assembly 132. The output from gear assembly 132 is provided to an output ring 140, which is fixedly attached to outer sleeve 142. A rolling shutter is attached to the outer sleeve 142, so that when motor 130 runs, outer sleeve 142 rotates, causing the rolling shutter 120 to open or close (depending on the direction of rotation of motor 130).

Outer sleeve 142 is also fixedly attached to a ring 136. Ring 136 drives position detector assembly 124. Position detector assembly 124 is electrically coupled to a control board 144. Control board 144 contains the electronics for starting and controlling the motor 130 (see Fig. 6). A capacitor 126 is used to start motor 130 (described below). A brake 128 is provided to slow motor 130 when the rolling shutter is approaching a limit position. Position detector assembly 124 may be a pass point assembly as described in application no. (attorney docket 64234) assigned to the assignee of this application or an absolute position detector assembly as described in application no. (attorney docket 65468)

assigned to the assignee of this application.

A schematic of the control circuit located on control board 142 is shown in Fig. 6. A controller 500 operates the various software routines which operate the rolling shutter operator 120. Controller 500 may be a Zilog Z86733 microcontroller. In this particular embodiment, the rolling shutter is controlled only by a wall or unit mounted switch 132 coupled via a connector J2. Connector J2 has inputs for up switch hot and down switch hot signals. In a rolling shutter apparatus, the motor moves only when the user presses the combination power direction switch connected to connector J2. Pressing the up or down switch simultaneously applies power to the motor via connector J1 and provides various motor phase and direction information to the controller 500.

However, the control circuit can be modified to include a receiver so that the rolling shutter can be commanded from a remote transmitter (as described above). Power supply circuit 190 converts AC line power from connector J2 into plus 5 volts to energize the logic circuits and plus 16 volts to energize the motor.

Upon receipt of a rolling shutter movement command signal from either 132A or 132B through J2, the motor is activated. Upon receipt of programming or learn commands from either 132A or 132B (described below), controller 500 enters an appropriate learn routine. Feedback information from the motor and AC power is provided from J1 and applied to U3:A, U3:B, U3:C and U3:D. The outputs from U3:B and U3:D provide up and down phase information to pins P26 and P25 respectively. The outputs from U3:A and U3:C provide up and down direction to pins P21 and P20, respectively.

In this particular embodiment, an absolute position detector comprising three wheels: clock, wheel 31 and wheel 32 is shown in Fig. 6. Crystal CR1 provides an internal clock signal for the microprocessor 500. EEPROM

200 stores the bit stream data, sliding window information, current bit information and lookup table. The IR signal break from clock wheel drives Q5 which provides it input to P31. Wheel 31 drives Q4 which provides its input to P30. Wheel 32 drives Q3 which provides its input to P33. The inputs from the absolute position detector provide an absolute position of the shutter to the controller.

The preferred method of the invention will be described, for convenience, with reference to a rolling shutter controller, i.e., one which requires activation of the wall control switch for application of power.

Referring to Figs. 7A-7C, the main motor control routine running in controller 500 begins with step 300. Step 300 begins whenever power on reset or stop mode recovery is enabled, or the watch dog timer times out. In step 302, the watch dog timer period is set to 100 milliseconds. An internal RC timer circuit is used instead of a looping counter run by the controller to save processing steps. In step 304 all controller ports are initialized. Specifically, referring to Fig. 6, ports or pins P30 (input from wheel 31 in the absolute position detector 124), P31 (input from the clock wheel in the absolute position detector 124) and P33 (input from wheel 32 in the absolute position detector 124). Absolute position detector 124 provides a signal which is indicative of the absolute position of the shutter in all its travel between limits. If a pass point assembly is utilized instead of an absolute position detector, the ports initialized would receive signals pertaining to whether the pass point had been passed, whether the shutter was above or below the pass point and information about RPM pulse.

In step 306, internal RAM is tested, then cleared to zero. If there is an error in RAM, then the routine loops until the watchdog timer resets in step 310 (100 ms time out from the RC timer). If there is no error, in

step 308 the routine completes a checksum and compares it to a stored sum. If there is no match, the routine loops until the watchdog timer resets in step 310 (100 ms time out from the RC timer). If the sums match, the routine  
5 initializes all timers and reinitializes the ports (P30, P31, P33) in step 312.

In step 314 all interrupt priorities are setup, the selected edges of the various input signals for response are initialized and all standard interrupts (RPM and  
10 Timer0) are initialized. The RPM interrupt runs every time the motor generates an RPM signal. The Timer0 interrupt checks for a pulse indication of a tap (press and release less than one half second) or command input. In step 316 all variables are set to their initial  
15 values. In step 318 the routine reads the stored limits from memory, the current position stored in memory and mode flags (indicating mode of operation, e.g., run or learn) from memory and initializes temporary registers.

In step 320 the routine checks if the reset flag is set. If yes, the routine branches to the pass point reset mode in step 326 if a pass point assembly is installed for 124. If an absolute position detector assembly is installed, step 326 would read the position in the detector and reset the values stored in memory.

25 If the reset flag is not set, the routine checks if the learned flag is less than 2. The learned flag stores a value indicating the learn mode has been entered. If the learned flag is greater than or equal to 2, the routine checks the value in the tap\_counter in step 324.  
30 The tap counter, tap\_counter, is a counter which stores the number of times the counter has received pulses indicating that the user has pressed and released the input switch for the predetermined time period. If the value in the tap counter is not equal to 5 in step 324,  
35 this means the user has activated the input device to command a shutter movement and the routine branches to the normal operation loop at step 334.



If the tap counter is equal to 5, the routine stores the learned flag with the value 1 and writes the value to memory at step 336, indicating a learn mode has been entered. Then the routine branches to the learn routine at step 338.

If the learned flag is less than 2 at step 322 the routine checks if the value of the tap counter is equal to 9 at step 328. This means, in Learn mode, the Tap\_Counter is read to assure that the count is not at 9 times. If the count is at 9 times, the user is putting the controller in reset mode. The Reset\_Flag is set and this flag value is written to memory in step 330. Then in step 336 the routine calls the pass point reset routine in step if a pass point assembly is installed or calls the absolute position routine if that assembly is installed. If the tap counter is not equal to 9, the routine branches to learn mode at step 329.

After initialization as described above, the Timer0 interrupt (or T0 interrupt) is enabled and occurs once every one millisecond. When the T0 interrupt is called each 1 ms, referring to Figs. 8A-8C, it begins at step 342 by incrementing a Delay Timer. The Delay Timer is used to count time in the main loop or other routines. Then the routine checks if the start flag = 1. If not, the routine returns at step 346. If yes, the routine checks if power input is high in step 348. If power is not high, the routine increments the OFF\_LFC (the power line off sampler), which measures the time power has been removed, such as by releasing the input switch. In step 356 if the OFF\_LFC is not greater than or equal to 22, the timer0 interrupt is exited at step 358. If the OFF\_LFC is greater than or equal to 22, the routine clears the OFF\_LFC and clears the direction debounce flags at step 370. At step 384 the routine checks if the power debounce is greater or equal to 3. If greater than or equal to 3, the routine clears the power debounce and the interrupt returns. If not, at step 388 the routine

clears the power debounce, disables the Timer0 interrupt, writes the value in the tap\_counter to memory, then enables the timer0 interrupt, loads the stop flag with 1 and returns to the beginning of the Timer0 interrupt.

5        In step 348, if power input is high, the routine increments the power line sampler and clears the OFF\_LFC at step 352. Next, at step 354, the routine checks if the motor is on. If yes, the timer0 routine ends at step 358. If not, the routine checks if the UP input is high  
10      at step 360. If yes, the routine increments the UP\_LFC and continues to step 368. If not, the routine checks at step 362 if the down input is high. If not, the routine continues to step 362. If yes, the routine increments the DOWN\_LFC.

15        At step 368 the routine checks the value of the POWER LFC. If it is not equal to 4, it returns at step 372. Then the routine checks if the power debounce is at 22 at step 376. If yes, it branches to step 390. If not, it increments the power debounce at step 378. The  
20      routine then checks if the power debounce is at 3 in step 380. If not, it branches to step 390. If yes, the routine increments the tap counter at step 382 and continues to step 390.

      At step 390 the routine checks if the UP\_LFC (the up  
25      direction sampler) is greater than or equal to 4. If not, the routine checks if the DOWN\_LFC is greater than or equal to 4 at step 392. If not, the routine branches to step 410. If yes, the routine checks if the DOWN\_DB is at 255 in step 394. If yes, the routine branches to  
30      step 410. If not, the routine clears the UP debouncer and decrements the down debouncer in step 398. Then the routine checks if the down debouncer is at 22 in step 4006. If not the routine branches to step 410. If yes, the routine sets the DOWN\_DB to 255 and clears the  
35      TAP\_CNTR. This indicates the user has pressed the down or close switch long enough to enable a movement command.

      If the UP LFC is greater than or equal to 4, the

routine checks if the UP\_DB is at 255 at step 396. If yes, indicating the user has pressed the up or open switch long enough to enable a movement command, the routine branches to step 410. If not, the routine clears the down debouncer and increments the up debouncer at step 400. At step 402 the routine checks if the UP DB is at 4. If not, the routine branches to step 410. If yes, the routine sets the UP DB to 255 and clears the tap counter at step 404. At step 410 the routine checks if the DOWN DB = 255. If not, the routine checks if the UP DB = 255 at step 414. If yes, the routine sets the UP\_AND\_DOWN flag to 1 at step 416 and returns at step 418. If the DOWN DB = 255, the routine sets the UP\_AND\_DOWN flag to 2 at step 412 and returns at step 418. The UP\_AND\_DOWN flag is used to keep track of which direction is being requested for travel. UP is 1; DOWN is 2.

Exhibit A (pages A1-A13) attached hereto include a source listing of a series of routines used to operate a movable barrier operator in accordance with the present invention.

As will be appreciated from studying the description and appended drawings, the present invention may be directed to operator systems for movable barriers of many types, such as fences, gates, overhead garage doors, and the like.

While there has been illustrated and described a particular embodiment of the present invention, it will be appreciated that numerous multiple embodiments will occur to those skilled in the art, and it is intended in the appended claims to cover all those changes and modifications which followed in the true spirit and scope of the present invention.

WHAT IS CLAIMED IS:

1. A movable barrier operator, comprising:  
a motor;  
a transmission connected to the motor to be driven  
5 thereby and to the movable barrier to be moved;  
a control unit having a first input device and a  
second input device for providing first and second input  
commands, respectively;  
a controller, responsive to activation of the first  
10 input device for a first period of time for commanding  
the motor to operate in a first direction, responsive to  
activation of the second input device for a second period  
of time, for commanding the motor to operate in a second  
direction, and responsive to at least two activations of  
15 one of the input devices, wherein each activation is  
within a defined period of time and has a duration less  
than the first period of time and the second period of  
time, for enabling a learn mode.
2. The movable barrier operator of claim 1,  
20 wherein the control unit couples AC power to the motor  
upon activation of the first input device and the second  
input device.
3. The movable barrier operator of claim 1,  
wherein the controller, responsive to an activation  
25 within a defined period of time and having a duration  
less than the first period of time and the second period  
of time, stores a count of the activation.
4. The movable barrier operator of claim 3,  
wherein the controller, responsive to an activation of  
30 the first period of time or the second period of time,  
clears the count.

5. The movable barrier operator of claim 1,  
wherein the controller, responsive to at least three  
activations of one of the input devices, wherein each  
activation is within a defined period of time and has a  
5 duration less than the first period of time and the  
second period of time, for enabling a reset mode.

6. The movable barrier operator of claim 1,  
wherein the controller, responsive to at least three  
activations of one of the input devices, wherein each  
10 activation is within a defined period of time and has a  
duration less than the first period of time and the  
second period of time, for enabling a group control mode.

7. The movable barrier operator of claim 1,  
wherein the controller, responsive to at least three  
15 activations of one of the input devices, wherein each  
activation is within a defined period of time and has a  
duration less than the first period of time and the  
second period of time, for enabling a lock mode.

8. The movable barrier operator of claim 1,  
20 wherein the controller, responsive to at least three  
activations of one of the input devices, wherein each  
activation is within a defined period of time and has a  
duration less than the first period of time and the  
second period of time, for enabling a clear memory mode.

25 9. A movable barrier operator, comprising:  
a motor;  
a transmission connected to the motor to be driven  
thereby and to the movable barrier to be moved;  
a wall control unit having a first input device and  
30 a second input device for providing first and second  
input commands, respectively;  
a controller, responsive to activation of the first  
input device for a delay of at least one half second, for

commanding the motor to operate in a first direction,  
responsive to activation of the second input device for a  
delay of at least one half second, for commanding the  
motor to operate in a second direction, and responsive to  
5 seven consecutive activations of one of the input  
devices, wherein each activation is within a defined  
period of time and has a duration less than one half  
second, for enabling a learn mode.

10. The movable barrier operator of claim 9,  
10 further comprising a counter for storing a count of each  
activation that is within three hundred milliseconds of  
another activation and is for a delay less than one half  
second.

11. The movable barrier operator of claim 10,  
15 wherein the controller, responsive to an activation of  
one half second or more, clears the counter.

12. The movable barrier of claim 9, wherein the  
controller, responsive to seven consecutive activations  
of one of the input devices, wherein each activation is  
20 within three hundred milliseconds of another activation  
and is for a delay less than one half second, for  
enabling a reset mode.

13. The movable barrier of claim 9, wherein the  
controller, responsive to five consecutive activations of  
25 one of the input devices, wherein each activation is  
within three hundred milliseconds of another activation  
and is for a delay less than one half second, for  
enabling a group control mode.

14. The movable barrier of claim 9, wherein the  
30 controller, responsive to twenty consecutive activations  
of one of the input devices, wherein each activation is  
within three hundred milliseconds of another activation

and is for a delay less than one half second, for enabling a lock mode.

15        15. The movable barrier of claim 9, wherein the controller, responsive to fifty consecutive activations of one of the input devices, wherein each activation is within three hundred milliseconds of another activation and is for a delay less than one half second, for enabling a clear memory mode.

10        16. A method of programming a controller for a movable barrier operator, comprising:  
         detecting activation of an input device;  
         measuring the period of time of the activation of the input device;  
         changing a count if the measured activation time  
15        period is less than a predetermined value and within a defined period of time;  
         enabling a learn mode when the count is equal to a predetermined value; and  
         activating a motor to move the barrier if the  
20        measured period of time is greater than the predetermined value.

17. The method of claim 16, further comprising the step of clearing the counter when the measured activation time period is more than the predetermined value.

25        18. The method of claim 17, wherein the predetermined value of the count is seven, the predetermined value is one half second, and the defined period of time is within three hundred milliseconds of another activation.

30        19. The method of claim 16, further comprising the step of enabling a reset mode when the count is seven, the predetermined value is one half second, and the

defined period of time is within three hundred milliseconds of another activation.

20. The method of claim 16, further comprising the step of enabling a group control mode when the count is  
5 five, the predetermined value is one half second, and the defined period of time is within three hundred milliseconds of another activation.

21. The method of claim 16, further comprising the step of enabling a lock mode when the count is twenty,  
10 the predetermined value is one half second, and the defined period of time is within three hundred milliseconds of another activation.

22. The method of claim 16, further comprising the step of enabling a clear memory mode when the count is  
15 fifty, the predetermined value is one half second, and the defined period of time is within three hundred milliseconds of another activation.

23. A method of operating a controller for a movable barrier operator, comprising:  
20 providing a power line;  
using said power line as a binary data generator;  
supplying a controller capable of monitoring and decoding said binary data, wherein power on and off states serve as binary ones and zeros; and  
25 performing a mode of operation corresponding to the decoded binary data received.

24. The method of claim 23, wherein the mode of operation corresponding to the decoded binary data is a learn mode.

30 25. The method of claim 23, wherein the mode of operation corresponding to the decoded binary data is a



reset mode.

26. The method of claim 23, wherein the mode of operation corresponding to the decoded binary data is a group control mode.


5        27. The method of claim 23, wherein the mode of operation corresponding to the decoded binary data is a lock mode.



10       28. The method of claim 23, wherein the mode of operation corresponding to the decoded binary data is a memory clear mode.



ABSTRACT OF THE DISCLOSURE


A method of programming a controller for a movable barrier operator includes enabling and disabling an input device within a predetermined period of time, a  
5 predetermined number of times. This sequence of short activations of an input device, such as a switch on a wall unit, puts the controller in a learn mode or a programmed state. Thereafter, the controller is  
10 responsive to learn any of the various routines that can be programmed for the movable barrier operator, such as transmitter code, limits of travel, force settings, and so on.

Fig. 1

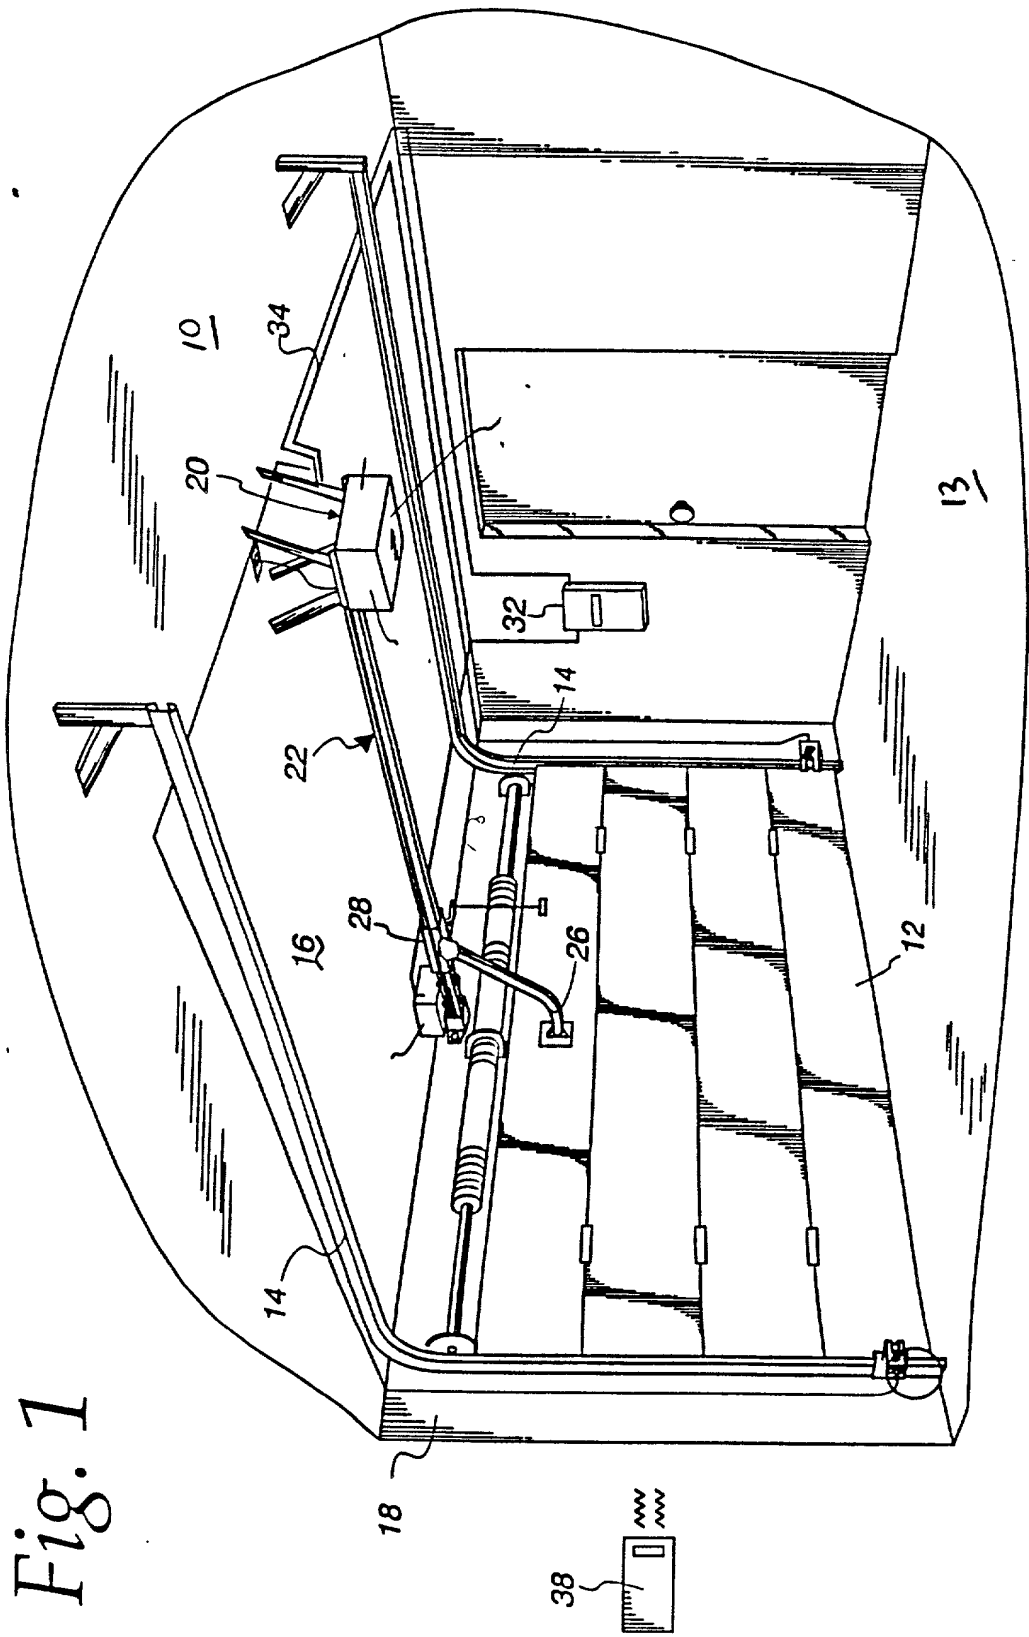

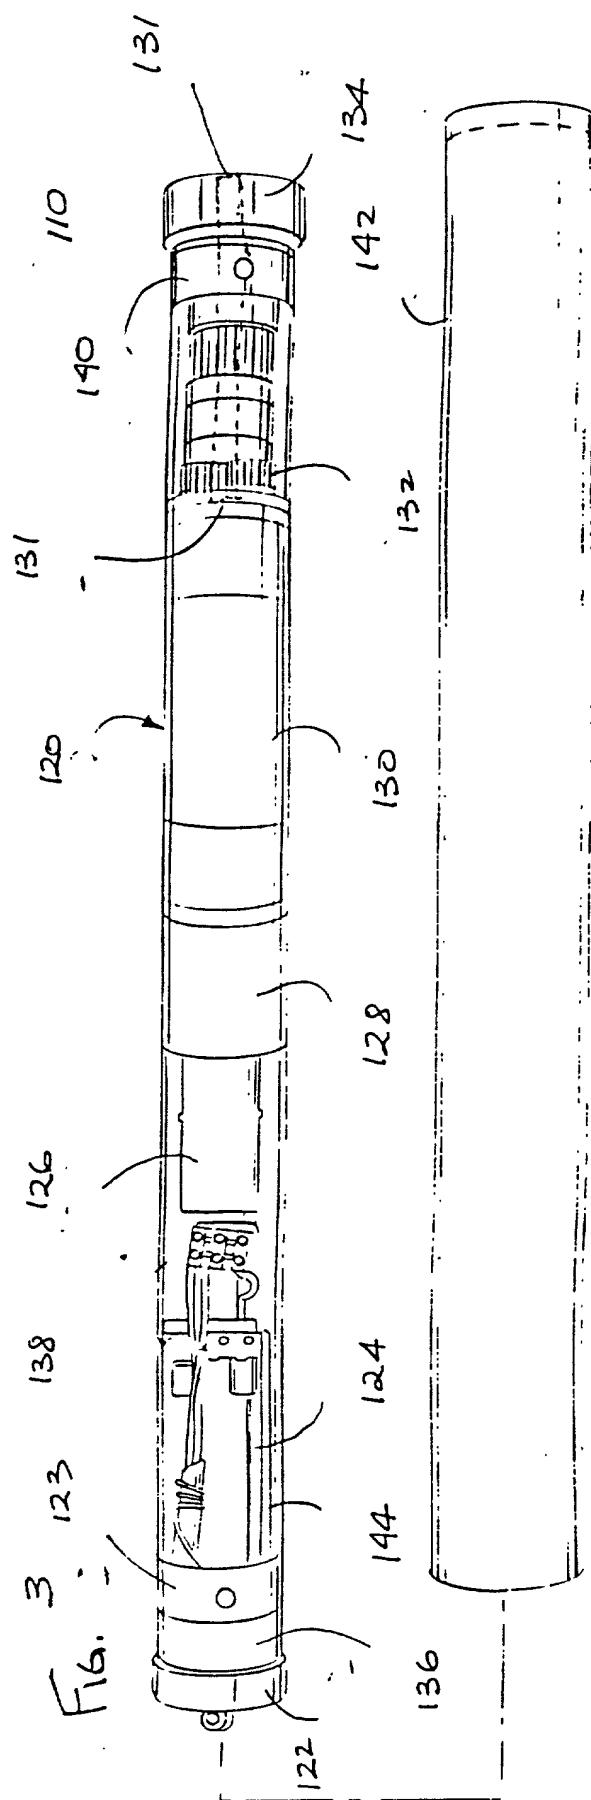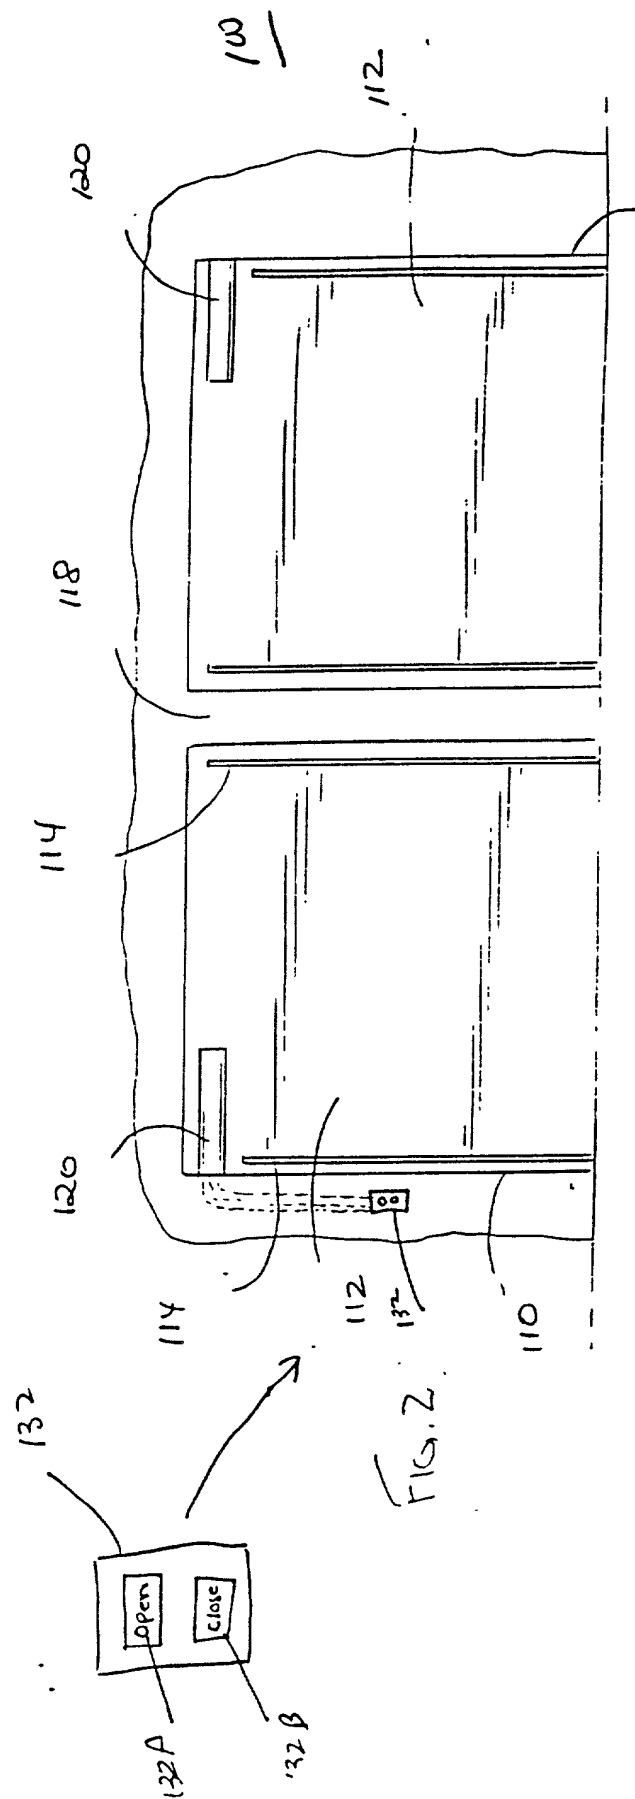

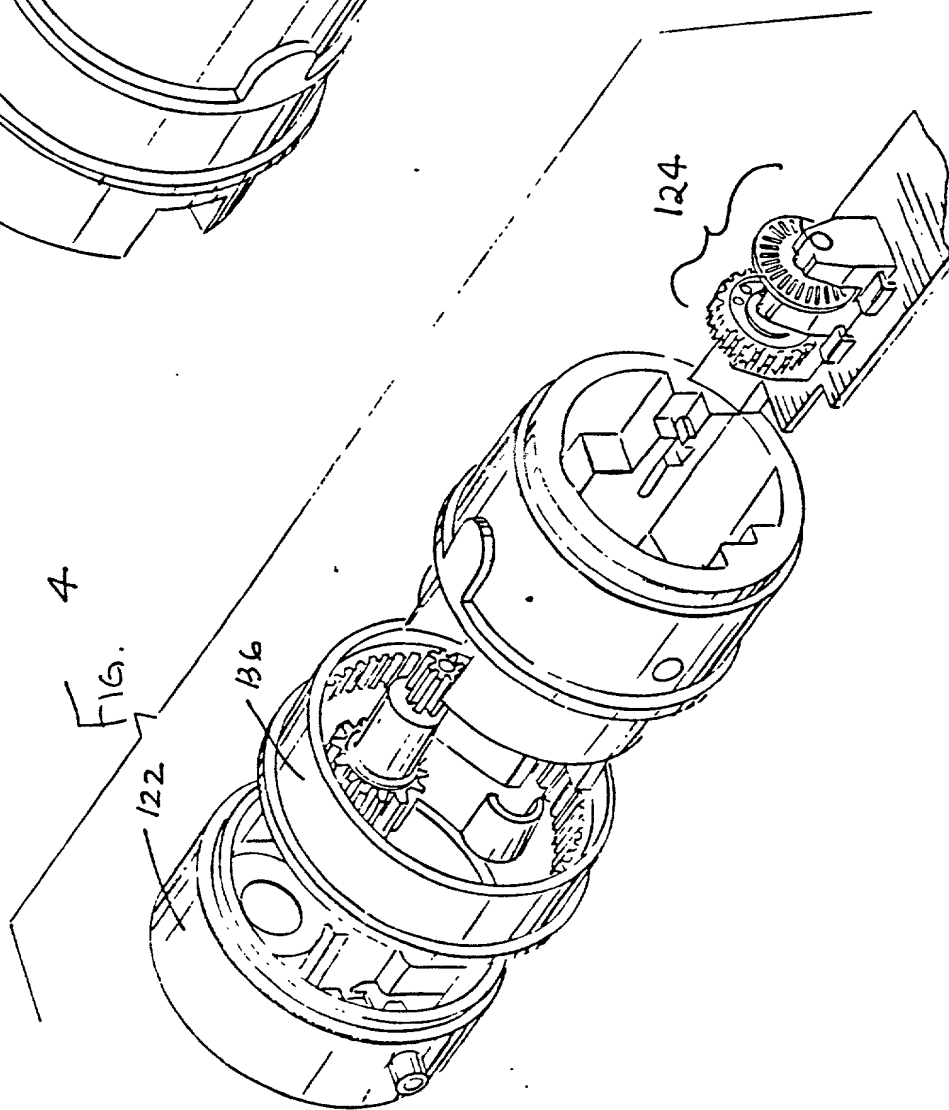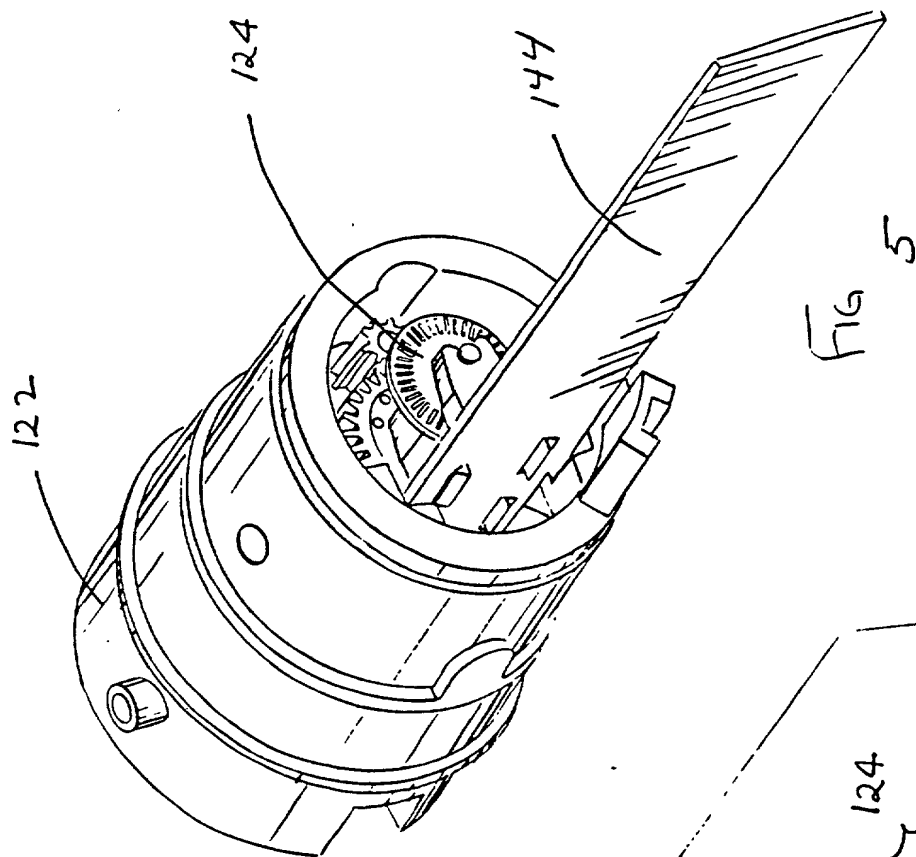

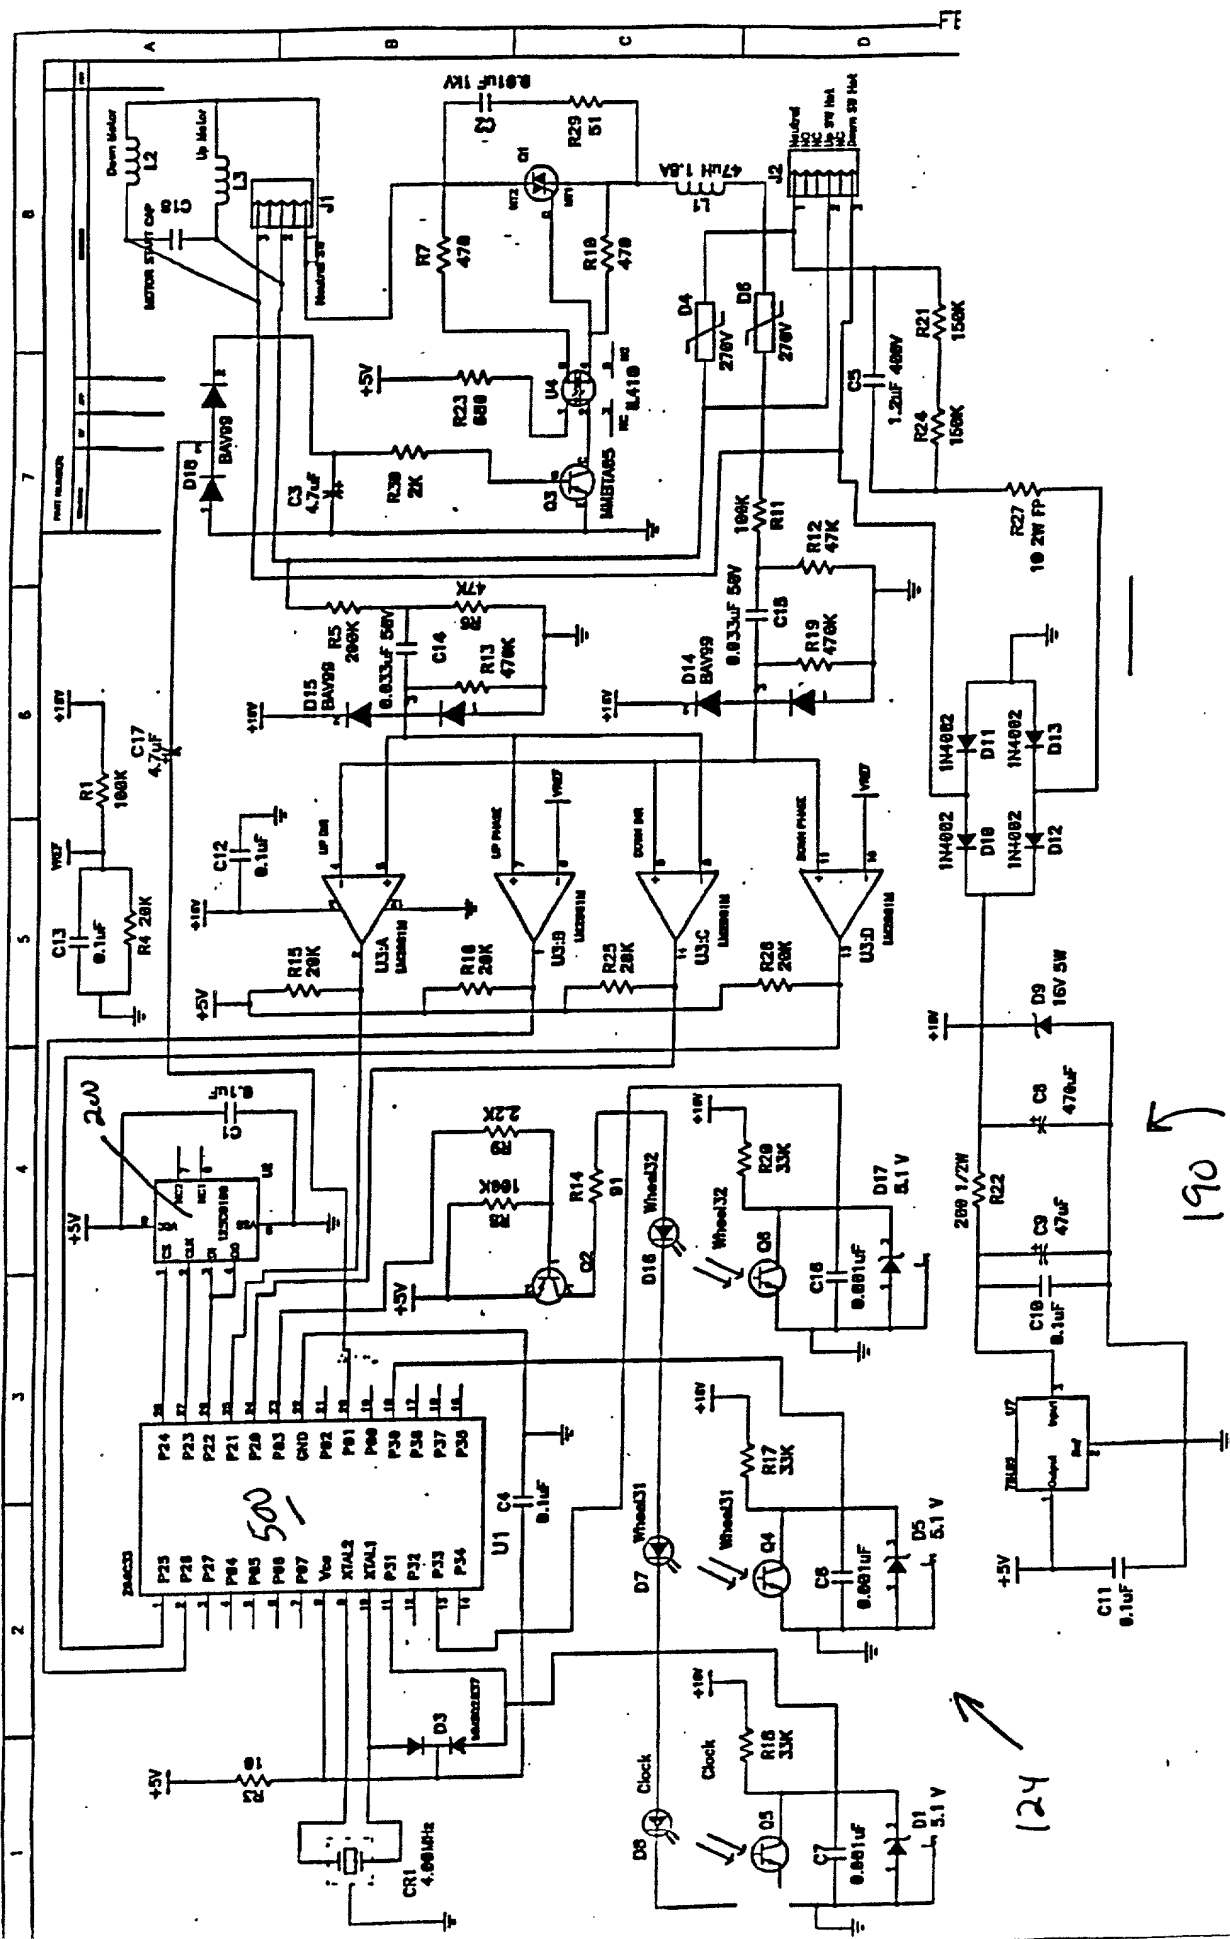[illegible]

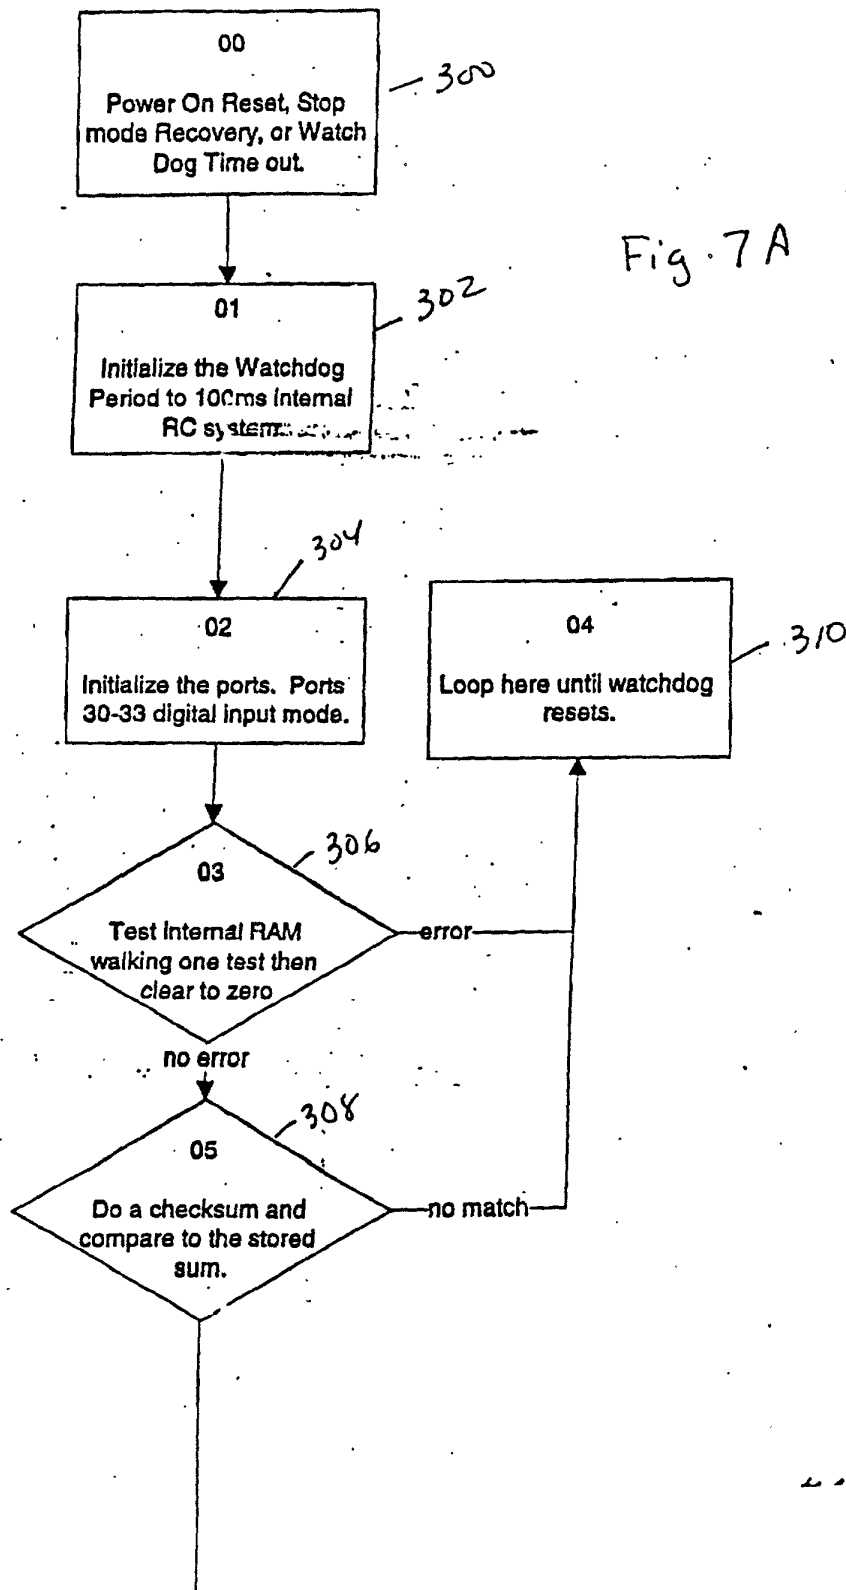
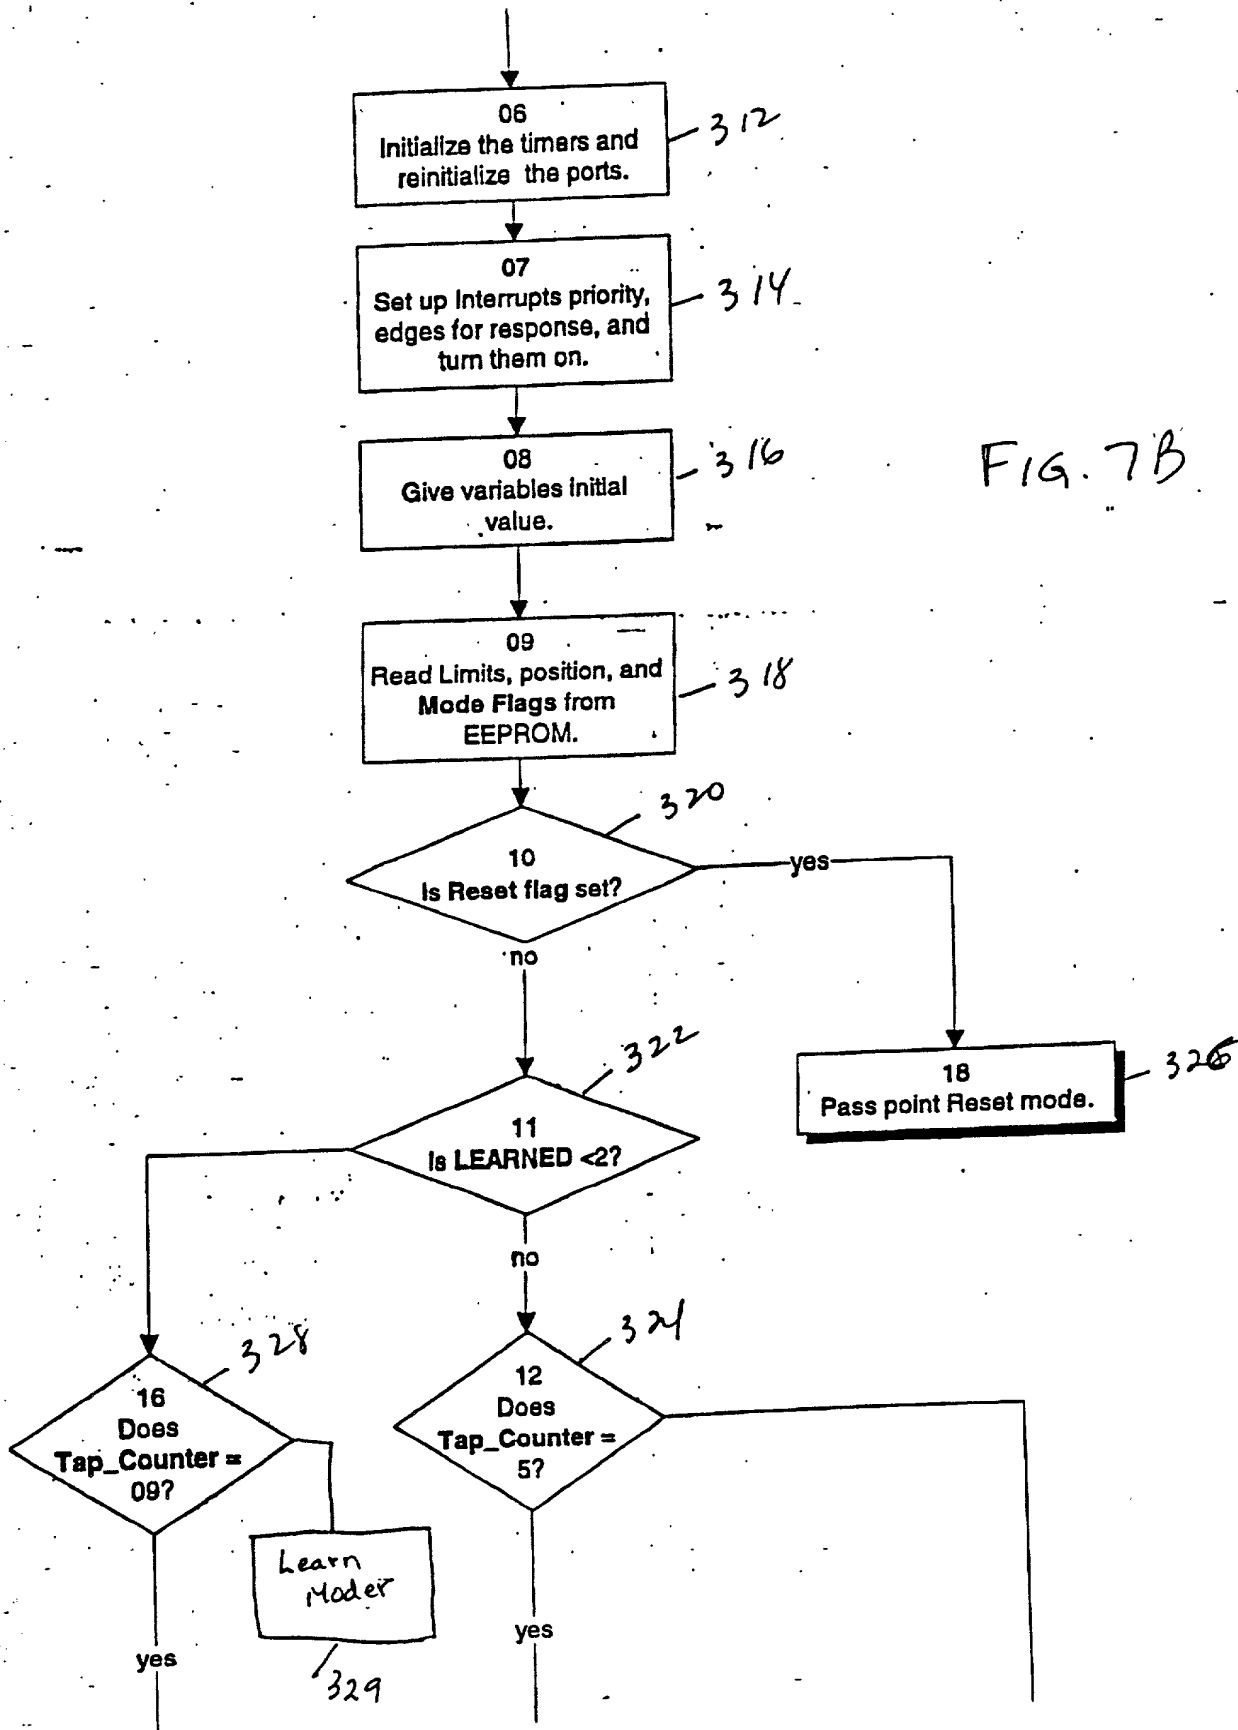


FIG. 7B





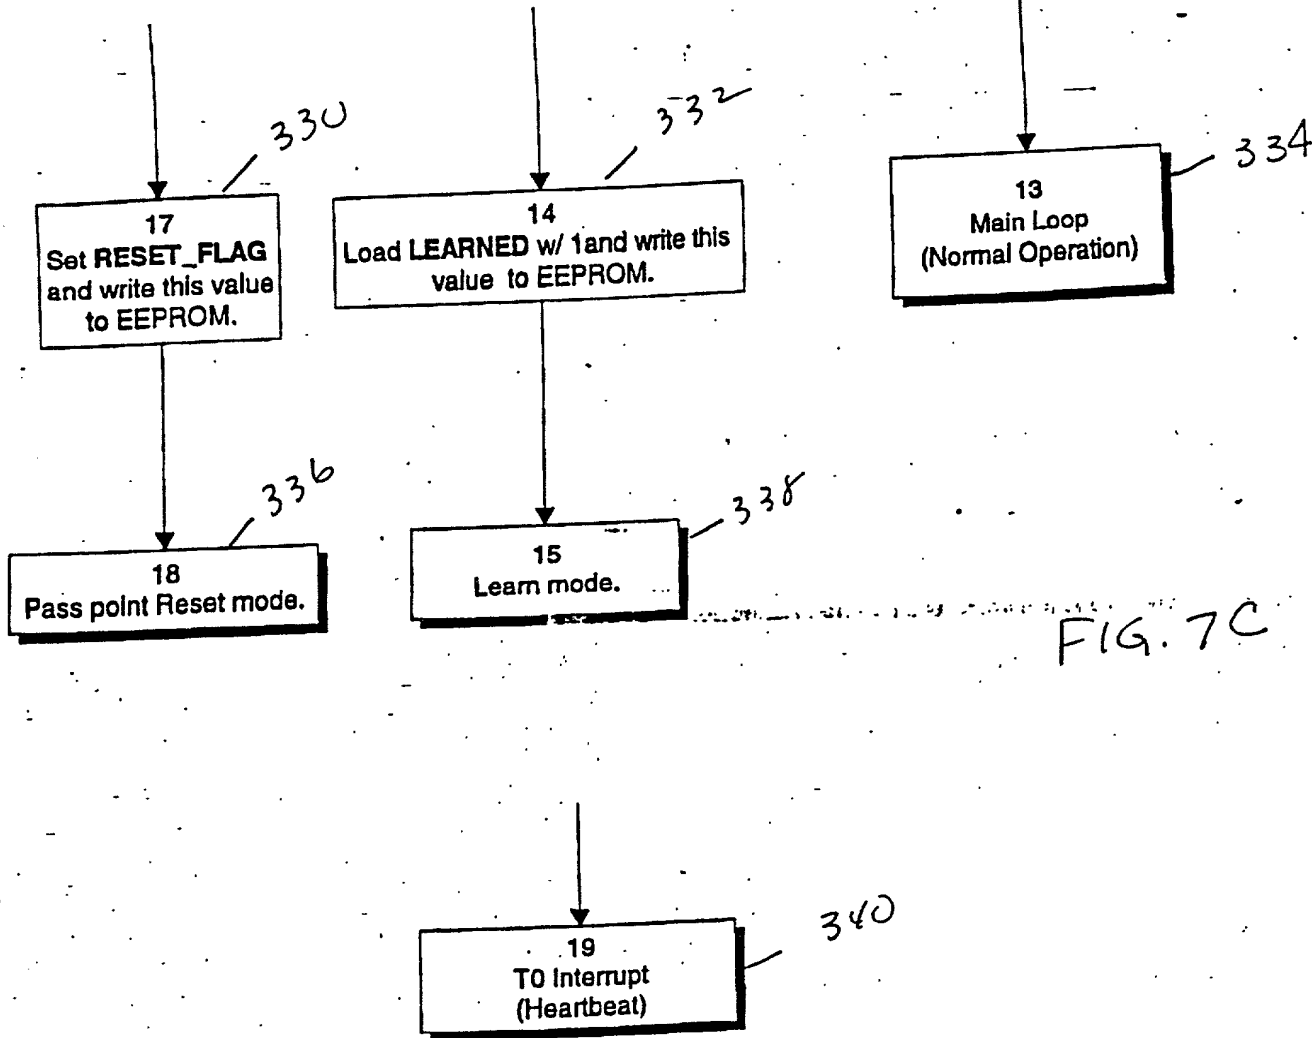


FIG. 7C

19.0  
TO\_INTERRUPT (HEARTBEAT) = 1ms.

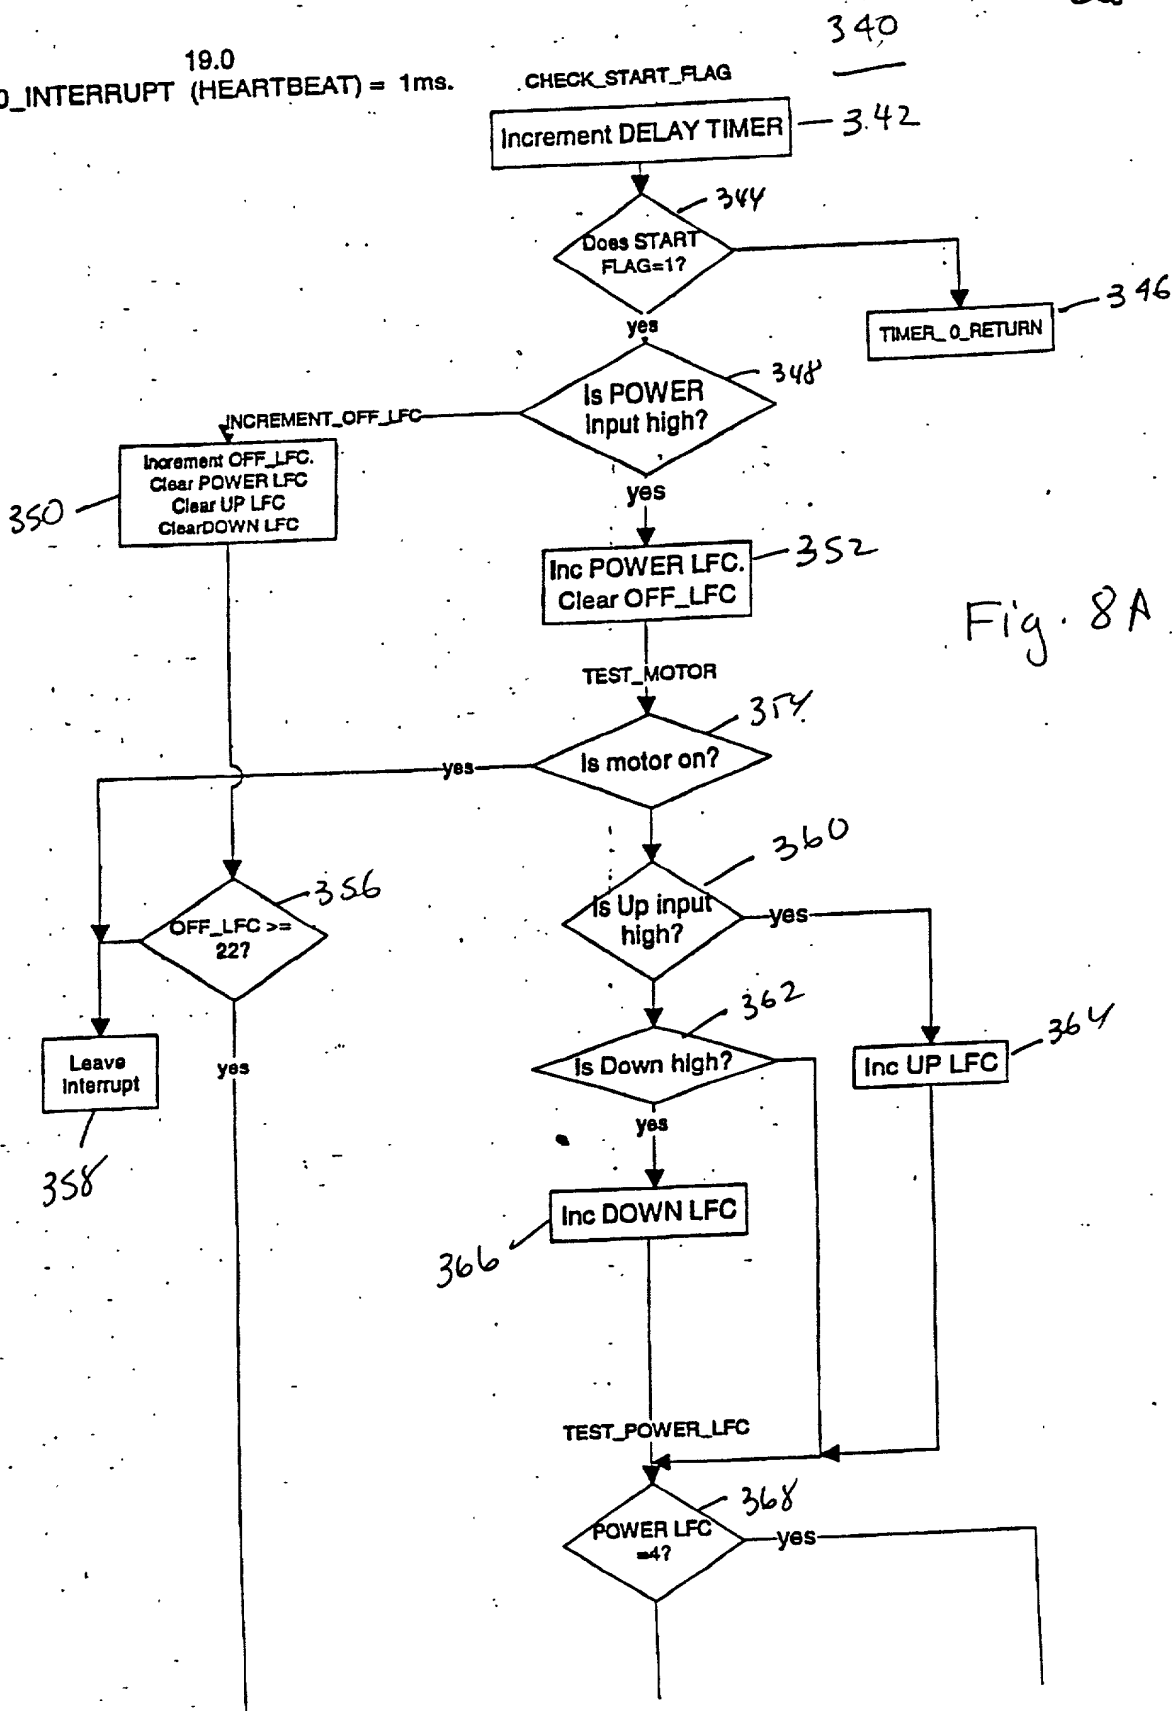
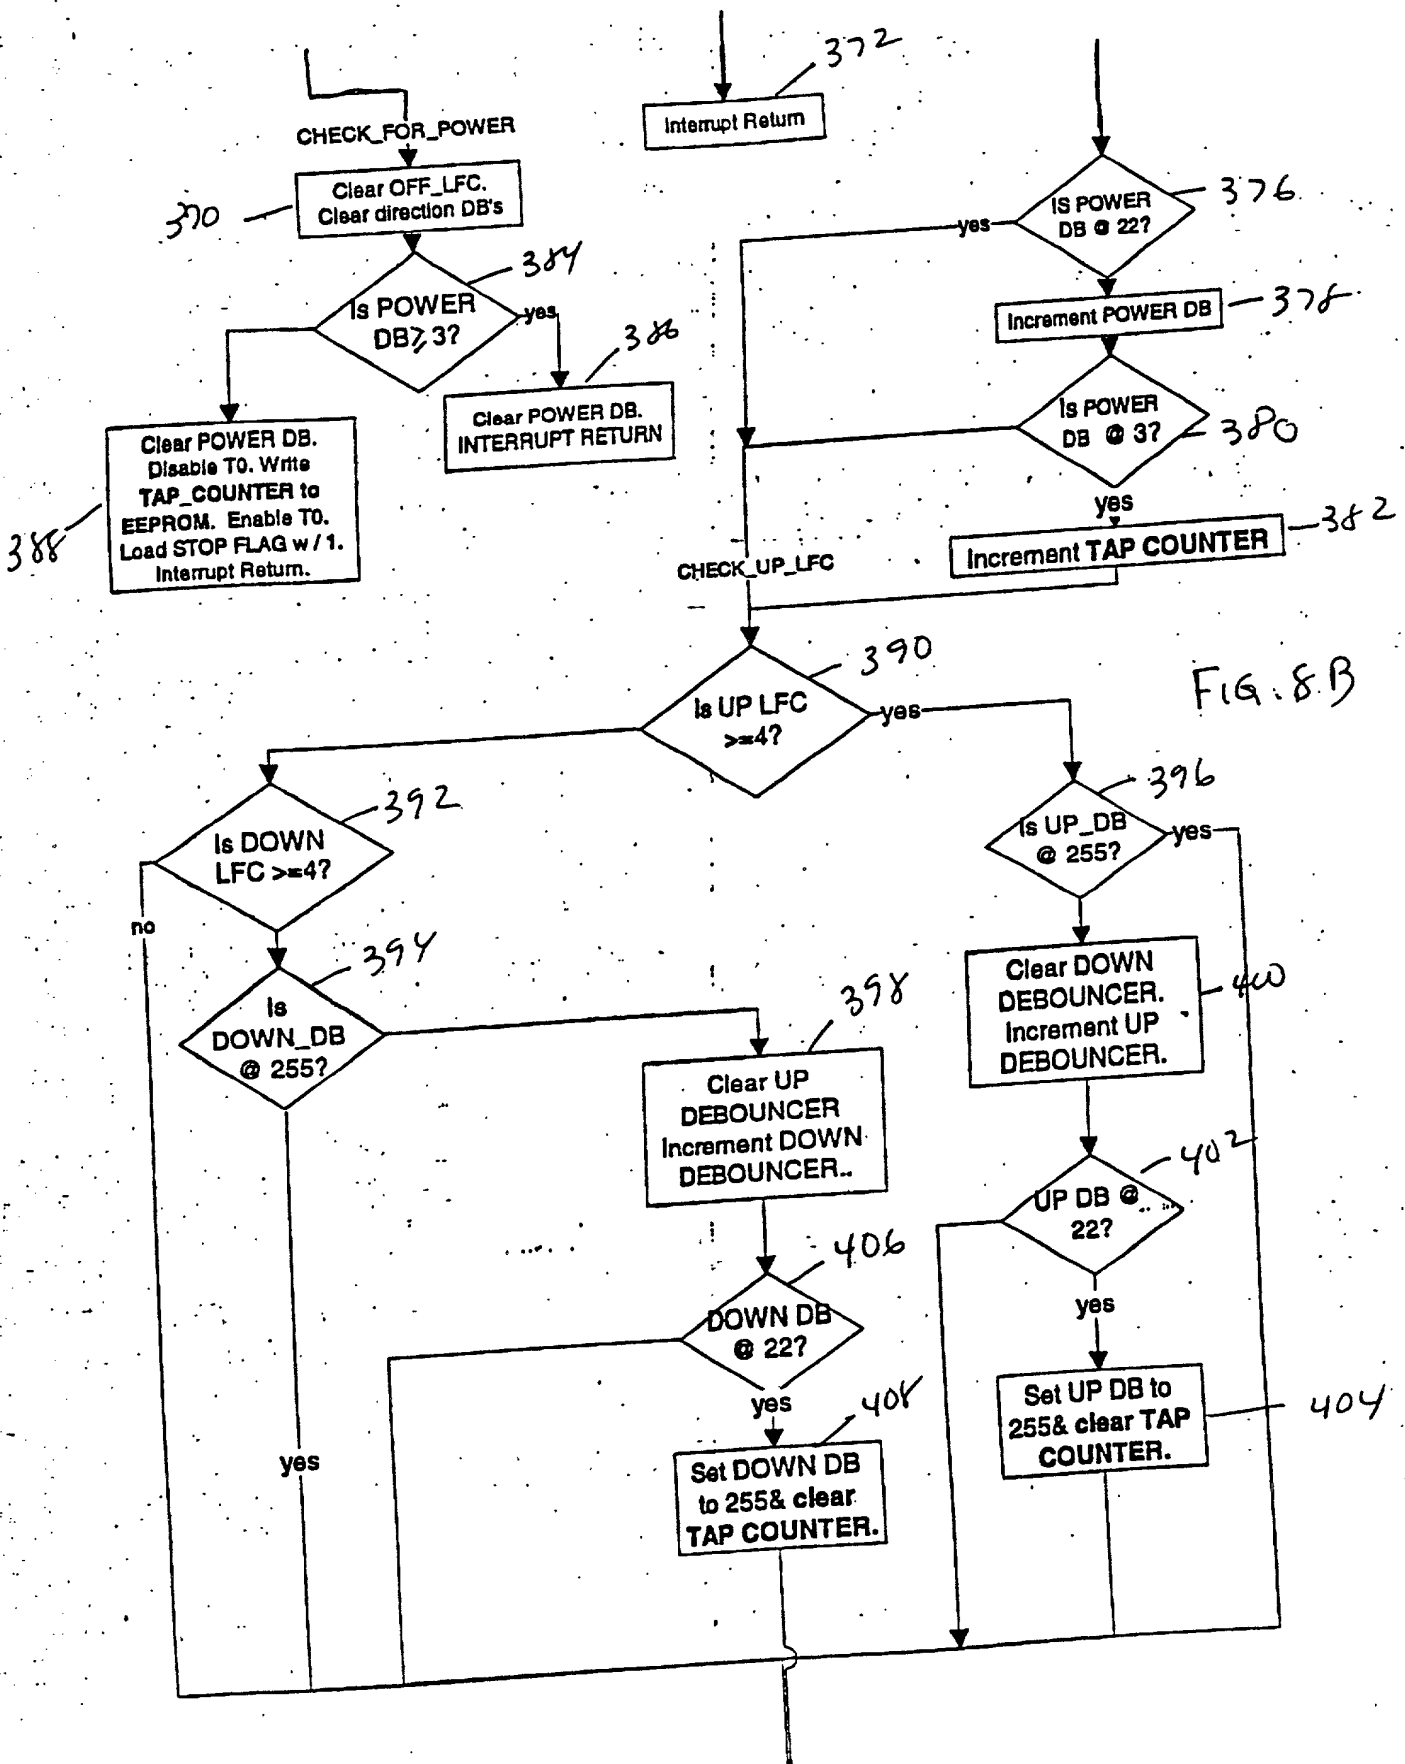


FIG. 8B



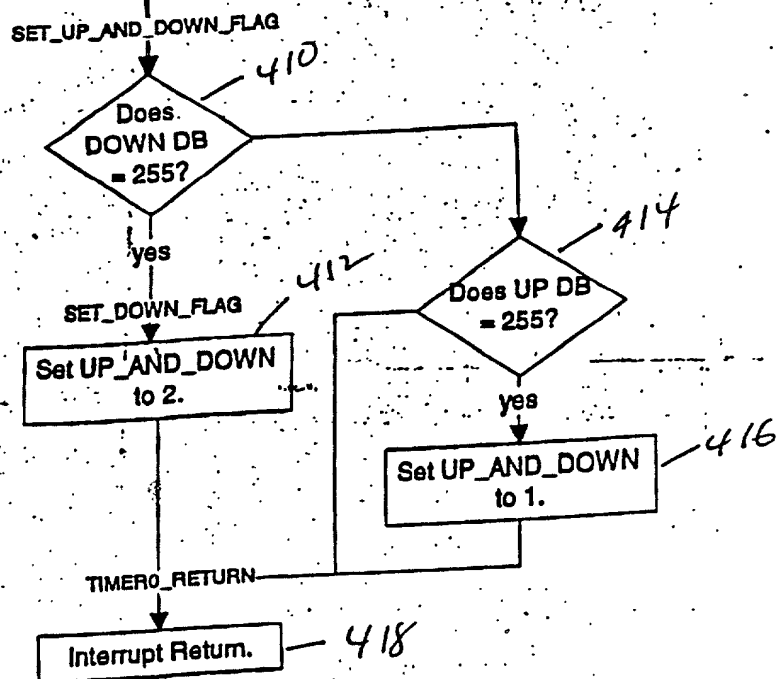


FIG. 8C

DECLARATION  
FOR UTILITY OR DESIGN  
PATENT APPLICATION

☐ Declaration Submitted With Initial Filing  
☐ Declaration Submitted After Initial Filing

) Attorney Docket No.: 68199  
)  
) First Named Inventor: Valente, et al.  
)  
) Application Number:  
)  
) Filing Date: Herewith  
)  
) Group Art Unit:  
)  
) Examiner Name:

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD AND APPARATUS FOR PROGRAMMING  
A LOGIC BOARD FROM SWITCHING POWER

(Title of Invention)

the specification of which:

( ) is attached hereto, or

( ) was filed by an authorized person on my behalf on

\_\_\_\_\_  
(Date)  
as United States Application Number \_\_\_\_\_  
or PCT International Application Number \_\_\_\_\_,  
and was amended on \_\_\_\_\_ (if applicable).  
(Date)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below, and I have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or any PCT international application, on this invention filed by me or my legal representatives or assigns and having a filing date before that of the application on which priority is claimed:

Prior Foreign Application Number(s)	Country	Foreign Filing Date	Priority Not Claimed	Certified Copy Attached	
				Yes	No
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet attached hereto.

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

Provisional Application  
Number(s)

Provisional Application  
Filing Date

X Additional provisional application numbers are listed on a supplemental priority data sheet attached hereto.

I hereby claim the benefit under Title 35, United States Code, §120, of any prior United States application(s), or under §365(c) of any PCT international application(s) designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose all information known by me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56, which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

<u>Prior U.S.</u> <u>Application Number</u>	<u>Prior PCT</u> <u>International</u> <u>Application Number</u>	<u>Filing Date of</u> <u>U.S. or PCT</u> <u>International</u> <u>Application</u>	<u>Patent Number</u> <u>(if applicable)</u>
09/252,044		02/17/99	Pending

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet attached hereto.

As a named inventor, I hereby appoint the practitioners associated with Customer Number 22242, with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and request that all correspondence and telephone calls in respect to this application be directed to FITCH, EVEN, TABIN & FLANNERY, Suite 1600, 120 South LaSalle

Street, Chicago, Illinois 60603-3406, Telephone No. (312) 577-7000, Facsimile No. (312) 577-7007, CUSTOMER NUMBER 22242.

\*222423\*

I hereby declare that all statements made herein of my own knowledge are true, and that all statements made herein on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity or enforceability of the application or any patent issued thereon.

Full name of sole or one joint inventor:

CHRISTOPHER M. VALENTE  
(Given names first, with Family name last)

Inventor's signature:

\_\_\_\_\_

Date:

\_\_\_\_\_

Residence:

Elmhurst, IL  
(City and State for U.S. Residents;  
City and Country for others)

Post Office Address:

161 West Jackson

Elmhurst, IL

Citizenship:

USA

Full name of sole or one joint inventor:

JAMES J. FITZGIBBON  
(Given names first, with Family name last)

Inventor's signature:

\_\_\_\_\_

Date:

\_\_\_\_\_

Residence:

Batavia, IL  
(City and State for U.S. Residents;  
City and Country for others)

Post Office Address:

1521 Hadley Drive

Batavia, IL

Citizenship:

USA

Full name of sole or one  
joint inventor:

RAMON TAM

(Given names first, with Family name last)

Inventor's signature:

Date:

Residence:

Chicago, IL

(City and State for U.S. Residents;  
City and Country for others)

Post Office Address:

4319 North Tripp

Chicago, IL

Citizenship:

USA

Full name of sole or one  
joint inventor:

MARK SIEGLER

(Given names first, with Family name last)

Inventor's signature:

Date:

Residence:

Brookfield, IL

(City and State for U.S. Residents;  
City and Country for others)

Post Office Address:

4421 Deyo

Brookfield, IL

Citizenship:

USA

Full name of sole or one  
joint inventor:

MARTIN RATHGEBER

(Given names first, with Family name last)

Inventor's signature:

Date:

Residence:

Chicago, IL

(City and State for U.S. Residents;  
City and Country for others)

Post Office Address:

1551 W. Thomas Street

Chicago, IL

Citizenship:

USA



Supplemental Data Priority Sheet

☐ Additional foreign application numbers:

Prior Foreign Application Number(s)	Country	Foreign Filing Date	Priority Not Claimed	Certified Copy Attached	
				Yes	No
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional provisional application numbers:

Prior Provisional Application Number(s)	Prior Provisional Application Filing Date
--	--

☐ Additional U.S. or PCT international application numbers:

Prior U.S. Application Number	Prior PCT International Application Number	Filing Date of U.S. or PCT International Application	Patent Number (if applicable)
----------------------------------	--	---	----------------------------------